

SA's Leading Past Year

Exam Paper Portal



You have Downloaded, yet Another Great
Resource to assist you with your Studies 😊

Thank You for Supporting SA Exam Papers

Your Leading Past Year Exam Paper Resource Portal

Visit us @ www.saexampapers.co.za



**SA EXAM
PAPERS**



basic education

Department:
Basic Education
REPUBLIC OF SOUTH AFRICA

SENIOR CERTIFICATE EXAMINATION/ NATIONAL SENIOR CERTIFICATE EXAMINATION

MECHANICAL TECHNOLOGY: AUTOMOTIVE

2021

MARKING GUIDELINES

MARKS: 200

These marking guidelines consist of 20 pages.

QUESTION 1: MULTIPLE-CHOICE QUESTIONS (GENERIC)

- | | | |
|-----|-----|------------|
| 1.1 | B ✓ | (1) |
| 1.2 | A ✓ | (1) |
| 1.3 | C ✓ | (1) |
| 1.4 | C ✓ | (1) |
| 1.5 | D ✓ | (1) |
| 1.6 | A ✓ | (1) |
| | | [6] |

QUESTION 2: SAFETY (GENERIC)**2.1 First aid basic treatment:**

- Examination ✓
- Diagnosis ✓
- Treatment ✓

(3)

2.2 Drill press (Already been switched on):

- Never leave the drill unattended while in motion. ✓
- Switch off the drill when leaving. ✓
- Use a brush or wooden rod to remove chips. ✓
- When reaching around a revolving drill, be careful that your clothes do not get caught in the drill or drill chuck. ✓
- Don't stop a revolving chuck with your hand. ✓
- Don't adjust the drill while working. ✓
- Don't open any guard while in motion. ✓
- Keep hands away from action points. ✓
- Do not force the drill bit into the material. ✓
- Apply cutting fluid if required. ✓

(Any 2 x 1) (2)

2.3 Isolation of electrode holder:

To prevent electric shock. ✓

(1)

2.4 Disadvantages of the process layout:

- Production is not always continuous. ✓
- Transportation costs between process departments may be high. ✓
- Additional time is spent in testing and sorting as the product moves to the different departments. ✓
- Damage to fragile goods may result from extra handling. ✓

(Any 2 x 1) (2)

2.5 Advantages of the product layout:

- Handling of material is limited to a minimum. ✓
- Time period of manufacturing cycle is less. ✓
- Production control is almost automatic. ✓
- Control over operations is easier. ✓
- Greater use of unskilled labour is possible. ✓
- Less total inspection is required. ✓
- Less total floor space is needed per unit of production. ✓

(Any 2 x 1) (2)

[10]

QUESTION 3: MATERIALS (GENERIC)**3.1 Heat-treatment:**

- Heat the metal slowly to a certain temperature. ✓
- Soak the metal for a certain period to ensure a uniform temperature. ✓
- Cool the metal at a certain rate to room temperature. ✓

(3)

3.2 Quenching mediums:

- Water ✓
- Brine ✓
- Liquid salts ✓
- Oil ✓
- Soluble oil and water ✓
- Sand ✓
- Molten lead ✓
- Air ✓
- Lime ✓

(Any 3 x 1) (3)

3.3 Annealing:

- To relieve internal stresses of the steel ✓
- Soften steel to make machining possible ✓
- Make steel ductile ✓
- Refine grain structure ✓
- Reduce brittleness ✓

(Any 1 x 1) (1)

3.4 Carbon steels:

- Low carbon steel ✓
- Medium carbon steel ✓
- High carbon steel ✓

(3)

3.5 Iron-carbon equilibrium diagram:

- A Percentage carbon / carbon content ✓
- B Temperature in °C ✓
- C AC3 line / Higher critical temperature ✓
- D AC1 line / Lower critical temperature ✓

(4)

[14]

QUESTION 4: MULTIPLE-CHOICE QUESTIONS (SPECIFIC)

4.1	C ✓	(1)
4.2	C ✓	(1)
4.3	D ✓	(1)
4.4	B ✓	(1)
4.5	C ✓	(1)
4.6	C ✓	(1)
4.7	B ✓	(1)
4.8	A ✓	(1)
4.9	C ✓	(1)
4.10	A ✓	(1)
4.11	A ✓	(1)
4.12	D ✓	(1)
4.13	C ✓	(1)
4.14	D ✓	(1)
		[14]

QUESTION 5: TOOLS AND EQUIPMENT (SPECIFIC)**5.1 Compression tester labels:**

- A – Pressure gauge/Pressure meter ✓
- B – Pressure release valve ✓
- C – Air hose/Pipe/Flexible pipe ✓
- D – Spark plug connector/Adapter ✓

(4)

5.2 Function of Cylinder Leakage Tester:

- To check where the combustion chamber/cylinder leaks gases ✓ during compression stroke/power stroke. ✓
- To determine the percentage ✓ pressure loss ✓ from the combustion chamber.

(Any 1 x 2) (2)

5.3 Cylinder leakage test procedure:

- Turn the crank shaft until both valves, on the cylinder to be tested, are closed. ✓
- Remove the HT leads / spark plugs ✓
- Connect the spark plug adaptor (tester) to the spark plug hole. ✓
- Lock the crankshaft pulley so that it cannot turn. ✓
- Couple the compressed air pipe to the tester and calibrate the tester. ✓
- Couple the spark plug adapter hose to the cylinder leakage tester. ✓
- Note the results and location of gas leakage occurring in the combustion chamber. ✓

(Any 6 x 1) (6)

5.4 Exhaust gas analyser:

- Hydrocarbon (fuel and oil vapour) / HC ✓
- Carbon dioxide / CO₂ ✓
- Sulphur dioxide / SO₂ ✓

(Any 2 x 1) (2)

5.5 Exhaust gas analysis test precautions:

- Always calibrate the exhaust gas analyser with the pick-up hose removed. ✓
- The pick-up hose must not be stepped on or restricted in any way. ✓
- The pick-up hose connections must be airtight. ✓
- The vehicle being tested should have no leaks in the exhaust, manifolds or vacuum systems. ✓
- Must be conducted in a well-ventilated area. ✓
- Take good care when handling the equipment. ✓

(Any 3 x 1) (3)

5.6 Function of Turn-tables:

To make it possible ✓ to turn the front wheels in and out / side to side ✓ when checking the wheel alignment angles.

(2)

5.7 Use of optical alignment gauge:

To measure / check the toe-in and toe-out of the vehicle. ✓

(1)

5.8 **Functions of OBD scanner:**

- Scan for faults (diagnostics). ✓
- Programme the ECU. ✓
- Reset fault codes. ✓
- Programme the keys to vehicle's ignition system. ✓

(Any 3 x 1)

**(3)
[23]**

QUESTION 6: ENGINES (SPECIFIC)**6.1 Correcting static imbalance:**

- By fitting balance mass pieces to the crank webs. ✓
- By removing metal from the crank webs. ✓
- By arranging the crank pins of the crankshaft. ✓

(Any 2 x 1) (2)**6.2 Crankshaft balancing:****6.2.1 Dynamic balancing:**Balancing in all directions ✓ while crankshaft is rotating. ✓ **(2)****6.2.2 Reciprocating mass:**The mass of the pistons, gudgeon pins ✓ and the upper third of the connecting rod. ✓ **(2)****6.3 Features to improve engine balance:**

- Connecting rods and pistons are kept as light as possible / static balanced. ✓
- Flywheel is carefully balanced. ✓
- Counterweights on the crankshaft. ✓
- The firing order is reconfigured. ✓

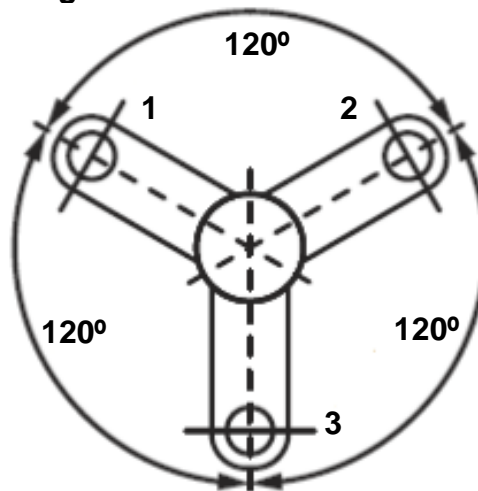
(4)**6.4 Types of vibration dampers:**

- Friction face-type ✓
- Combined rubber and friction disc ✓
- Rubber type ✓
- Inertia ring type ✓

(Any 2 x 1) (2)**6.5 Different types of cylinder arrangements:**

- A Inline type / Straight arrangement ✓
- B V-type ✓
- C W-type / double-V type ✓

(3)

6.6 Three-cylinder inline engine:**Marking:**

Labelling power impulse angle 120°. ✓

Drawing position of crankpins. ✓

Numbering of crankpins. ✓

(3)

6.7 Types of superchargers:

- Roots ✓
- Twin-screw ✓
- Centrifugal and ✓
- Vane ✓

(Any 3 x 1)

(3)

6.8 Advantages of using a turbocharger:

- More power is obtained from an engine with the same engine capacity. ✓
- A turbocharger is driven by the exhaust gases of the engine and therefore there is no power loss. ✓
- It gives improved fuel consumption in proportion to engine capacity. ✓
- The effect of height above sea level on power is eliminated. ✓
- Improve volumetric efficiency. ✓

(Any 3 x 1)

(3)

6.9 Turbocharger:

- A Intercooler/air cooler ✓
- B Compressed air flow ✓
- C Turbine/Turbine housing/Turbocharger ✓
- D Exhaust gas flow/exhaust system/exhaust manifold ✓

(4)

[28]

QUESTION 7: FORCES (SPECIFIC)**7.1 Terms:****7.1.1 Power:**

Power is the rate ✓ at which work is done. ✓ (2)

7.1.2 Compression Ratio:

It is the ratio between the total volume of a cylinder when the piston is at bottom dead centre (BDC) ✓ to the volume in a cylinder when the piston is at top dead centre (TDC). ✓ (2)

7.2 Calculation of compression ratio:**7.2.1 Swept volume:**

$$\text{Swept Volume} = \frac{\pi D^2}{4} \times L$$

$$= \frac{\pi \times 7^2}{4} \times 7,5$$

$$SV = 288,63 \text{ cm}^3 \quad \checkmark \quad (3)$$

7.2.2 Original clearance volume:

$$\begin{aligned} CV &= \frac{SV}{CR - 1} \\ &= \frac{288,63}{9,5 - 1} \quad \checkmark \\ &= \frac{288,63}{8,5} \end{aligned}$$

$$CV = 33,96 \text{ cm}^3 \quad \checkmark \quad (3)$$

7.2.3 New bore diameter:

$$\text{Compression ratio} = \frac{SV + CV}{CV}$$

$$= \frac{SV}{CV} + 1$$

$$SV = CV(CR - 1) \quad \checkmark$$

$$= 33,96(10 - 1) \quad \checkmark$$

$$SV = 305,64 \text{ cm}^3 \quad \checkmark$$

$$SV = \frac{\pi D^2}{4} \times L$$

$$\text{Diameter} = \sqrt{\frac{SV \times 4}{\pi \times L}} \quad \checkmark$$

$$D = \sqrt{\frac{305,64 \times 4}{\pi \times 7,5}} \quad \checkmark$$

$$D = 7,203 \text{ cm}$$

$$D = 72,03 \text{ mm} \quad \checkmark$$

(6)

7.3 Power calculations:

7.3.1 Torque:

$$\text{Torque} = \text{Force} \times \text{Radius}$$

$$= (25 \times 10) \times \frac{420}{1000}$$

$$= 250 \times 0,42$$

$$= 105 \text{ N.m} \quad \checkmark$$

(3)

7.3.2 Indicated power:

$$P = 900 \text{ kPa} = 900 \times 10^3 \text{ Pa}$$

$$L = 86 \text{ mm} = \frac{86}{1000} = 0,086 \text{ m} \quad \checkmark$$

$$D = 84 \text{ mm}$$

$$= \frac{84}{1000} = 0,084 \text{ m} \quad \checkmark$$

$$\begin{aligned} A &= \frac{\pi \times D^2}{4} \\ &= \frac{\pi \times 0,084^2}{4} \quad \checkmark \\ &= 5,54 \times 10^{-3} \text{ m}^2 \quad \checkmark \end{aligned}$$

OR

$$\begin{aligned} A &= \frac{\pi \times D^2}{4} \\ &= \frac{\pi \times 84^2}{4} \quad \checkmark \\ &= 5541,77 \text{ mm}^2 \quad \checkmark \\ &= 5541,77 \times 10^{-6} \text{ m}^2 \quad \checkmark \end{aligned}$$

$$N = 2000 \text{ r/min} = \frac{2000}{60 \times 2} \quad \checkmark = 16,667 \text{ power stroke/sec} \quad \checkmark$$

$$n = 4 \text{ cylinders}$$

$$IP = PLANn$$

$$\begin{aligned} &= (900 \times 10^3) \times 0,086 \times 5541,77 \times 10^{-6} \times 16,667 \times 4 \quad \checkmark \\ &= 28596 \text{ W} \\ &= 28,60 \text{ kW} \quad \checkmark \end{aligned}$$

OR

$$N = 2000 \text{ r/min} = \frac{2000}{60} = 33,333 \text{ r/sec} \quad \checkmark$$

$$n = \frac{4}{2} = 2 \text{ power strokes} \quad \checkmark$$

$$IP = PLANn$$

$$\begin{aligned} &= (900 \times 10^3) \times 0,086 \times 5541,77 \times 10^{-6} \times 33,333 \times 2 \quad \checkmark \\ &= 28600 \text{ W} \\ &= 28,60 \text{ kW} \quad \checkmark \end{aligned}$$

(8)

7.3.3 Brake power:

$$\text{Brake Power} = 2\pi NT$$

$$= 2 \times \pi \times \frac{2000}{60} \times 105 \quad \checkmark$$

$$= 21\,991,149 \text{ W} \quad \checkmark$$

$$= 21,99 \text{ kW} \quad \checkmark$$

(3)

7.3.4 Mechanical efficiency:

$$\text{Mechanical efficiency} = \frac{\text{BP}}{\text{IP}} \times 100$$

$$= \frac{21,99}{28,60} \times 100 \quad \checkmark$$

$$= 76,89 \% \quad \checkmark$$

(NO UNIT, NO MARK FOR FINAL ANSWER)(2)
[32]

QUESTION 8: MAINTENANCE (SPECIFIC)**8.1 Cooling system pressure test:**

- 8.1.1 Repair or replace water hose or clamp. ✓ (1)
- 8.1.2 Cylinder head gasket blown. / Cylinder head warped. ✓ (1)
- 8.1.3 Replace Welch or core plug. ✓ (1)
- 8.1.4 Replace radiator cap with suitable replacement. ✓ (1)

8.2 Function of the radiator cap:

- Regulates the pressure in the cooling system. ✓
 - Allows coolant to return to the radiator from the expansion tank. ✓
 - The radiator cap seals / close the cooling system. ✓
- (Any 2 x 1) (2)

8.3 Exhaust gas readings causes:**8.3.1 Possible causes of high carbon monoxide (CO) reading:**

- Too rich mixture ✓
 - Ignition misfire ✓
 - Dirty or restricted air filter ✓
 - Improper operation of the fuel delivery system. ✓
 - Faulty thermostat / stuck in open position or coolant sensor ✓
 - Non-functioning PCV valve system ✓
 - Catalytic converter not working ✓
- (Any 2 x 1) (2)

8.3.2 Possible causes high nitrogen oxide (NO_x) reading:

- Lean fuel mixture ✓
 - Improper spark advance ✓
 - Malfunctioning EGR valve ✓
 - Malfunctioning catalytic converter ✓
- (Any 2 x 1) (2)

8.3.3 Possible causes high oxygen (O₂) reading:

- Too lean air-fuel ratio ✓
 - Ignition problems ✓
 - Vacuum leaks ✓
 - Malfunctioning catalytic converter ✓
- (Any 2 x 1) (2)

8.4 Safety requirements when setting up the oil tester:

- Ensure the tester can read the expected pressures of the engine. ✓
- Clean the sender unit area before fitting the tester. ✓
- Ensure that the rubber hoses of the tester are not perished. ✓
- Keep the tester away from moving engine parts when conducting the test. ✓

(Any 3 x 1) (3)**8.5 Fuel-pressure test/manufacturers' specifications:**

- Fuel pressure (suction) before the fuel pump. ✓
- Fuel pump delivery pressure (after the fuel pump). ✓
- Fuel-line pressure at idle speed. ✓
- Fuel-line pressure at high revolutions. ✓
- Fuel pressure in the common rail (at injectors). ✓

(Any 4 x 1) (4)**8.6 Compression test:****8.6.1 High tension leads:**

- The ignition system will be disabled. ✓
- Prevent electrical shock. ✓
- To have access to the spark plugs in order to remove them. ✓

(Any 1 x 1) (1)**8.6.2 Throttle valve fully open:**

- To ensure maximum amount of air enters the cylinder. ✓
- To obtain a correct reading. ✓

(Any 1 x 1) (1)**8.6.3 Recording the readings:**

- Compared to the specifications reading. ✓
- To note the differences in readings between the cylinders. ✓

(Any 1 x 1) (1)**8.7 Increase in compression after wet test:**

- Piston ring / Compression ring ✓
- Cylinder (sleeve / walls) ✓

(Any 1 x 1) (1)
[23]

QUESTION 9: SYSTEMS AND CONTROL (AUTOMATIC GEARBOX) (SPECIFIC)**9.1 Differences between an automatic gearbox and a manual gearbox:**

- Manual – clutch pedal operated. ✓
Automatic – no clutch pedal operated. ✓
- Manual – Gears selected manually with gear lever. ✓
Automatic – Gears selected automatically by the gearbox. ✓

(Any 1 x 2) (2)**9.2 Function of torque converter:**

- Multiplies engine torque automatically according to road and engine speeds. ✓
- Transfers drive from the engine to the transmission. ✓
- Acts as a Flywheel to keep the engine turning during the idle strokes. ✓
- Slips during initial acceleration and while stopping to prevent stalling. ✓
- Dampens torsional vibrations of the engine. ✓
- Drives the Transmission oil pump. ✓

(Any 2 x 1) (2)**9.3 Lockup clutch:**

To overcome slip ✓ that occurs inside the torque converter. ✓

(2)**9.4 Stall speed:**

- The condition when the impeller of a torque converter rotates at maximum speed ✓ and the turbine is almost stationary. ✓
- When the pump has reached the highest velocity ✓ and the turbine is at stall (standing still). ✓
- When the vehicle is stationary ✓ just before it starts moving / while the engine is idling. ✓

(Any 1 x 2) (2)**9.5 Single epicyclic gear system:****9.5.1 Epicyclic gear train:**

- A Sun gear ✓
- B Annulus / Ring gear ✓
- C Planet gear ✓
- D Planet carrier ✓

(4)

9.5.2 Advantages of an epicyclic gear train:

- The input shaft and output shaft have the same axis of rotation. ✓
- Load is distributed to several planetary gears. ✓
- Many transmission-ratio options from ONE or a combination of several gear trains. ✓
- Longer service life compared to traditional gearboxes for similar load. ✓
- Epicyclic gearbox has the ability to transmit higher torque. ✓
- It has less inertia. ✓
- Used to obtain higher gear ratios. ✓
- Compact in size.
- All the gears are constantly in mesh. ✓

(Any 2 x 1) (2)

9.6 Function of the valve body:

- It detects the load ✓ and adjust the gear ratio according to the torque requirements. ✓
- It directs the oil pressure ✓ to the correct hydraulic actuator. ✓

(Any 1 x 2) (2)

9.7 Methods of cooling the automatic transmission oil:

- By using a special oil cooler alongside the engine cooling radiator ✓ and circulating transmission fluid through it. ✓
- Circulating transmission fluid ✓ through a radiator. ✓
- The transmission oil sump ✓ is designed with fins to assist with cooling. ✓

(Any 1 x 2) (2)
[18]

QUESTION 10: SYSTEMS AND CONTROL (AXLES, STEERING GEOMETRY AND ELECTRICITY) (SPECIFIC)**10.1 Requirements of a well-planned steering mechanism:**

It must be ...

- light and easy to control. ✓
- free from vibration and road shocks. ✓
- as direct as possible without needing too much driver attention or effort. ✓
- self-centring. ✓
- able to operate without being unduly affected by the action of the suspension or braking systems. ✓

(Any 3 x 1) (3)**10.2 Wheel alignment angles:****10.2.1 Function of Positive camber:**

- Less steering effort ✓
- The vehicle mass being carried by the larger inner front wheel bearing. ✓

(Any 1 x 1) (1)**10.2.2 Function of Ackermann's angle:**It allows for variable toe-out to the front wheels on turns. ✓ **(1)****10.3 Caster:****10.3.1 Wheel alignment angle:**C Negative ✓ caster ✓ angle **(2)****10.3.2 Negative caster angle purpose:**Negative caster ensures easier turning ✓ and provides better cornering to the vehicle. ✓ **(2)****10.3.3 Caster angle labels:**

- A. King pin / Steering axis ✓
 - B. Perpendicular line ✓
 - D. Centre line of kingpin / Steering axis ✓
- (3)**

10.4 Engine management system:**10.4.1 Function of sensor:**

- It detects the engine operating conditions. ✓✓
- It gives the input information to the ECU. ✓✓

(Any 1 x 2) (2)**10.4.2 Function of actuators:**

- It gets the output information / signal from the ECU. ✓✓
- It makes the necessary adjustments. ✓✓

(Any 1 x 2) (2)

- 10.5 **Requirements to make the catalytic convertor function effectively:**
- The convertor working temperature must not exceed 600 °C. ✓
 - Unleaded petrol must be used. ✓
 - Prevent persistent misfire. ✓
 - Prevent burnt engine oil from melting the ceramic monolith. ✓
 - The lambda sensor must function properly. ✓
- (Any 2 x 1)** (2)
- 10.6 **Lambda sensor:**
The lambda sensor is fitted on the exhaust system. ✓ (1)
- 10.7 **Adaptive speed control:**
- Maintain a speed as set by the driver. ✓
 - Adapt the speed to maintain a safe distance from the vehicle in front. ✓
 - Provide a warning if there is a risk of a collision. ✓
 - Prevent driver fatigue. ✓
 - Improve fuel economy. ✓
 - A constant controlled speed setting prevents speeding fines. ✓
- (Any 3 x 1)** (3)
- 10.8 **Diode:**
- 10.8.1 Diode ✓ (1)
- 10.8.2 **Function of the diode:**
- The function of the diode is used to change alternating current ✓ into direct current. ✓
 - It allows the current flow in the circuit in one direction only ✓ and blocks it from flowing in the opposite direction. ✓
- (Any 1 x 2)** (2)

10.9 Function of components in the alternator:**10.9.1 Rectifier:**

Converts alternating current (AC) to direct current (DC). ✓ (1)

10.9.2 Stator:

- To provide a core ✓ that concentrates the magnetic lines of force onto the stator windings. ✓
- To provide a coil ✓ into which a voltage is induced which is used to charge the battery. ✓
- Converts the rotating magnetic field ✓ to electric current to charge the battery. ✓

(Any 1 x 2) (2)

10.9.3 Rotor:

- Provides a rotating ✓ electro-magnet. ✓
- Induces an electric voltage ✓ into the stator windings. ✓
- Fitted with slip rings ✓ to allow for a moving electrical connection. ✓

(Any 1 x 2) (2)

10.10 Functions of the check valve in the electric fuel pump:

- It ensures the pressure in the fuel line is maintained. ✓
 - It allows the fuel to flow in one direction only from the fuel tank. ✓
- (2)
[32]

TOTAL: 200