

SA's Leading Past Year

Exam Paper Portal



You have Downloaded, yet Another Great Resource to assist you with your Studies 😊

Thank You for Supporting SA Exam Papers

Your Leading Past Year Exam Paper Resource Portal

Visit us @ www.saexampapers.co.za



SA EXAM PAPERS

SA EXAM
PAPERS



Province of the
EASTERN CAPE
EDUCATION



NATIONAL SENIOR CERTIFICATE

GRADE 12

SEPTEMBER 2023

MECHANICAL TECHNOLOGY: WELDING AND METALWORK MARKING GUIDELINE

MARKS: 200

This marking guideline consists of 12 pages.

QUESTION 1: MULTIPLE-CHOICE QUESTIONS (GENERIC)

- 1.1 C ✓ (1)
- 1.2 D ✓ (1)
- 1.3 C ✓ (1)
- 1.4 C ✓ (1)
- 1.5 A ✓ (1)
- 1.6 B ✓ (1)
- [6]**

QUESTION 2: SAFETY (GENERIC)**2.1 Arc welding safety precautions:**

- Wear the correct PPE. ✓
- Ensure the electrode holder is well insulated. ✓
- The environment must be free of water and combustible materials. ✓
- Ensure the environment is well ventilated. ✓ (Any 3 x 1) (3)

2.2 Pedestal drilling machine safety precautions:

- Wear correct PPE. ✓
- Make sure all guards are in place. ✓
- Clamp the workpiece securely. ✓
- Use the correct drill bit. ✓
- Do not make any adjustment while the machine is in motion. ✓
- Use the correct speed. ✓
- Do not remove chips by hand. ✓ (Any 2 x 1) (2)

2.3 Manual guillotine maximum cutting thickness is 1,20 mm ✓ (1)

2.4 2.4.1 Advantages of product layout:

- Handling of material is limited to a minimum. ✓
- Time period of manufacturing cycle is less. ✓
- Production control is almost automatic. ✓
- Greater use of unskilled labour is possible. ✓
- Less total inspection is required. ✓
- Less total floor space is needed per unit of production. ✓ (Any 2 x 1) (2)

2.4.2 Advantages of the process layout:

- High machine utilisation because more than one product is manufactured. ✓
- Better supervision as a result of subdivision of processes. ✓
- Less interruption in flow of work when machines become defective. ✓
- Lower equipment cost, since one machine can produce more than one product. ✓
- Better control of total manufacturing cost. ✓
- Greater flexibility in the production process. ✓ (Any 2 x 1) (2)

[10]

QUESTION 3: MATERIALS (GENERIC)**3.1 Purpose of case hardening:**

- To produce a hard case over ✓ and tough core. ✓ (2)

3.2 Using high carbon steel for case hardening

- The hardness will penetrate the core. ✓ (1)

3.3 Factors of hardness:

- Work piece size ✓
- Quenching rate ✓
- Carbon content ✓ (3)

3.4 Types of quenching mediums:

- Water and salt (brine) ✓
- Tap water ✓
- Liquid salts ✓
- Molten lead ✓
- Soluble oil and water ✓
- Oil ✓ (Any 3 x 1) (3)

3.5 Colour coding of engineering materials:

- To identify the type of materials as well as the carbon content of steel ✓ (1)

3.6 Types of tests:

- 3.6.1
- Filing test ✓
 - Machining test ✓ (Any 1 x 1) (1)

- 3.6.2
- Sound test ✓
 - Spark test ✓ (Any 1 x 1) (1)

- 3.6.3
- Bending test ✓ (1)

3.7 Machine for spark test:

- Pedestal grinding machine ✓ (1)

[14]

VRAAG 4: MULTIPLE-CHOICE QUESTIONS (SPECIFIC)

4.1 D ✓

4.2 D ✓

4.3 C ✓

4.4 A ✓

4.5 A ✓

4.6 D ✓

4.7 A ✓

4.8 B ✓

4.9 A ✓

4.10 A ✓

4.11 D ✓

4.12 B ✓

4.13 A ✓


4.14 D ✓

(14 x 1) **[14]**

QUESTION 5: TERMINOLOGY (TEMPLATES) (SPECIFIC)

5.1 Other side up ✓ (1)

5.2 Sketch of roof truss:

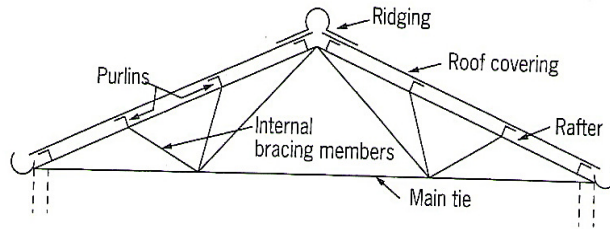

✓✓✓✓✓✓✓

(6)

5.3. Calculations of steel ring:

5.3.1 Mean Θ = Outside Θ – plate thickness

OR

Inside Θ + plate thickness

Mean Θ = 520 – 42 ✓

= 478 mm ✓

Mean Circumference = $\pi \times \text{mean } \Theta$


= $\pi \times 478$

= 1501,87 mm ✓

Rounded of to 1 502 mm for one ring. ✓

(4)

5.3.2

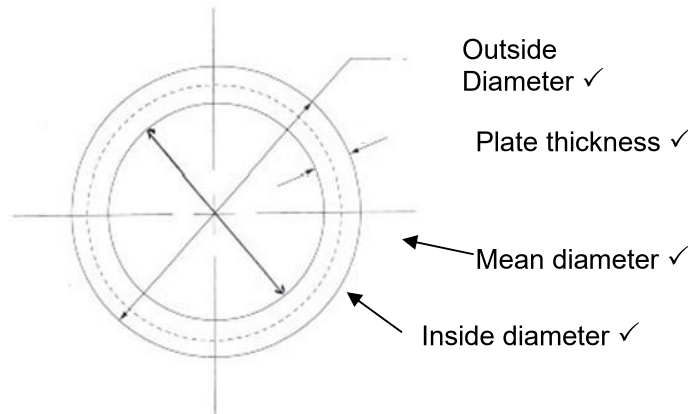

(4)

- 5.4
- A – Contour symbol ✓
 - B – Finish symbol grinding ✓
 - C – Length of weld ✓
 - D – Pitch of weld ✓
 - E – Weld all round ✓
 - F – Arrow ✓
 - G – Finish symbol machining ✓
 - H – Tail ✓

(8)

[23]

QUESTION 6: TOOLS AND EQUIPMENT (SPECIFIC)

- 6.1 A – Current adjuster ✓
 B – Electrode terminal ✓
 C – Electrode holder ✓
 D – Electrode ✓
 E – Arc gap ✓
 F – Earth terminal ✓
 G – Earth clamp ✓
 H – Current scale ✓ (8)
- 6.2 Metal inert gas ✓ (1)
- 6.3 CO₂ and Terrell ✓✓ (2)
- 6.4 The *power saw* is used to rough-cut large sections of metal ✓ before they are further machined or used in manufacturing. It uses a reciprocating movement. ✓
 The *band saw* cut in a horizontal position continuously in a forward direction ✓ due to the fact that the band is continuously moving in a circular path. ✓ (4)
- 6.5 Stock ✓
 Mixer ✓
 Nozzle ✓ (3)
- [18]**

QUESTION 7: FORCES (SPECIFIC)

- 7.1 7.1.1 **Stress**

$$\text{Stress} = \frac{\text{LOAD}}{\text{AREA}}$$

$$= \frac{80 \times 10^3}{\frac{\pi D^2}{4}} \checkmark$$

$$\pi D^2 = \frac{4 \times 80 \times 10^3}{30 \times 10^6} \checkmark$$

$$D^2 = \frac{4 \times 80 \times 10^3}{\pi \times 30 \times 10^6} \checkmark \checkmark$$

$$D = 58,2 \text{ mm} \checkmark$$
 (5)

- 7.1.2 **Strain**
 Young's Modulus = $\frac{\text{STRESS}}{\text{STRAIN}}$

$$\text{Strain} = \frac{\text{Stress}}{\text{Young's modulus}} \checkmark$$

$$= \frac{30 \times 10^6}{90 \times 10^9} \checkmark$$

$$\text{Strain} = 0,00033 \checkmark$$
 (3)

7.1.3 **Change in length**

$$\text{Strain} = \frac{\text{Change in length}}{\text{Original length}}$$

$$\text{Change} = \text{Strain} \times \text{Original length} \checkmark$$

$$= 0,00033 \times 4 \checkmark$$

$$= 0,00133 \text{ mm} \checkmark \quad (3)$$

7.2 7.2.1 **Reactions**

Take reactions RL and RR

$$RR \times 10 = (3 \times 3) + (10 \times 4) + (6 \times 7) \checkmark$$

$$= 9 + 40 + 42$$

$$= 91 \checkmark$$

$$RR = 9,1 \text{ N} \checkmark$$

$$RL \times 10 = (6 \times 3) + (10 \times 6) + (3 \times 7) \checkmark$$

$$= 18 + 60 + 21$$

$$= 99 \checkmark$$


$$RL = 9,9 \text{ N} \checkmark \quad (6)$$

$$7.2.2 \quad BM_A: (9,9 \times 3) = 29,7 \text{ N/m} \checkmark$$


$$BM_B: (9,9 \times 5) - (3 \times 2) = 43,5 \text{ N/m} \checkmark \checkmark$$

$$BM_C: (9,9 \times 7) - (3 \times 4) - (10 \times 3) = 27,3 \text{ N/m} \checkmark \checkmark \quad (5)$$

7.3 Framework:

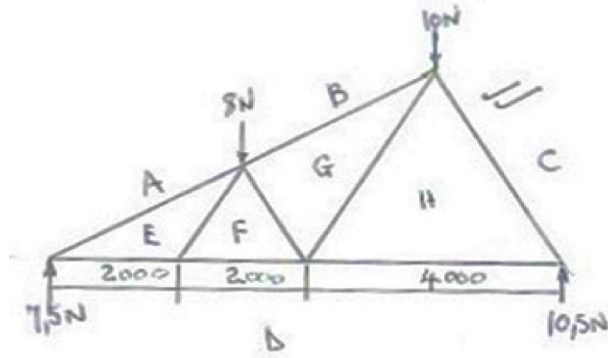

Member	Strut	Tie	Force
AE	✓✓		15,3 N ✓
BG	✓✓		11,3 N ✓
CH	✓✓		12,2 N ✓
FG	✓✓		6,9 N ✓
EF			
DE		✓✓	13,25 N ✓
DF		✓✓	13,25 N ✓
DH		✓✓	6,2 N ✓
GH		✓✓	7 N ✓

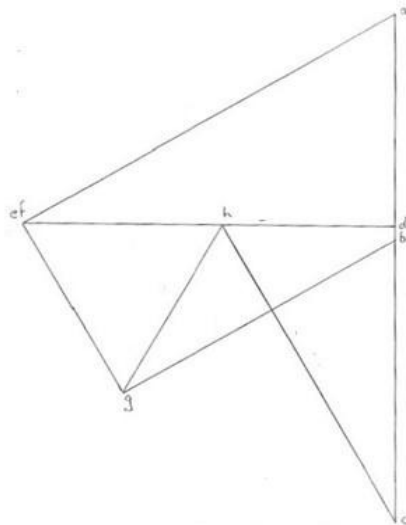

Guide

(23)
[45]

QUESTION 8: JOINING METHODS (INSPECTION OF WELDS)

- 8.1
- The liquid dye penetrant is sprayed onto the clean surface being inspected. ✓
 - Allow a short time for the liquid to penetrate. ✓
 - Remove the excess dye with a cleaner (solvent). ✓
 - Wash the surface and allow to dry. ✓
 - When the surface is dry, spray it with a developer to bring out the colour, which was sprayed on and penetrated any cracks or pin holes. ✓
 - Fluorescent liquids are also used for the surface being inspected. ✓✓
 - After a short while, remove the liquid with a cleaner and wait for it to dry. ✓
 - A black-light source (ultraviolet light) is then brought up to the surface. ✓
 - Areas where the fluorescent liquid has penetrated will show up under the light. ✓
- (Any 8 x 1) (8)
- 8.2 It refers to a cavity-type formed by gas ✓ during the solidification ✓ of molten weld metal. ✓
- (3)
- 8.3
- Shape of profile ✓
 - Uniformity of surface ✓
 - Overlap ✓
 - Undercutting
 - Penetration bead
 - Root groove
- (Any 3 x 1) (3)
- 8.4
- Slag inclusion ✓
 - Porosity ✓
 - Lack of fusion ✓
 - Oxidised or burnt metal ✓
- (4 x 1) (4)
- 8.5
- Correct flame for the work at hand ✓
 - Correct angle of welding torch and welding rod ✓
 - Depth penetration and amount of fusion
 - The rate of progress along the joint
- (Any 2 x 1) (2)
- 8.6
- Good for ferrous and non-ferrous metals ✓
 - Low cost ✓
 - Easy to apply ✓
 - Minimal training required
- (Any 3 x 1) (3)
- [23]**

QUESTION 9: JOINING METHODS (STRESSES AND DISTORTION) (SPECIFIC)

- 9.1
- Do not over weld. ✓
 - Control the fill up. ✓
 - Use intermittent welds. ✓
 - Use the smallest leg size for fillet welds. ✓
 - Use minimum root opening.
 - Use minimum included angle.
 - Select joints that use minimum weld metal. (Any 4 x 1) (4)
- 9.2
- Do not over weld. ✓
 - Proper preparation is needed. ✓
 - Use intermittent welding. ✓
 - Use as few passes as possible. ✓
 - Place welds near the neutral axis. ✓
 - Use back step welding.
 - Anticipate shrinkage forces.
 - Plan the welding sequence.
 - Minimise welding time. (Any 5 x 1) (5)
- 9.3
- Low carbon steel (0,15–0,30%) ✓ known as mild steel. ✓
 Medium carbon steel (0,31–0,70%) ✓ known as spring steel. ✓
 High carbon steel (0,71–1,5%) ✓ known as tool steel. ✓ (6)
- 9.4
- It is common in gas metal arc welding ✓ and comprises of droplets of molten material ✓ that are generated at or near the welding arc. ✓ (3)
- [18]**

QUESTION 10: MAINTENANCE (SPECIFIC)

- 10.1
- To accommodate multiple technicians to do maintenance, ✓ using their own locks. ✓ (2)
- 10.2
- If excessive loads are applied onto the spindle bearings, ✓ the grinding wheel and the grinding machine motor. ✓ (2)
- 10.3
- The journals and bearings/bushes must be well lubricated. ✓
 - Failure to lubricate the components will result in friction and wear of the components. ✓ (2)
- 10.4
- To monitor the machine's condition. ✓
 - To assist in upholding warranties and guarantees that forms part of the service agreements. ✓ (2)
- [8]**

QUESTION 11: TERMINOLOGY (SPECIFIC)

$$\begin{aligned}
 11.1 \quad 11.1.1 \quad \text{Length CG} &= \sqrt{60^2 + 130^2 + 260^2} \quad \checkmark \\
 &= \sqrt{88\,100} \\
 &= 296,82 \text{ mm} \quad \checkmark \quad (2)
 \end{aligned}$$

$$\begin{aligned}
 11.1.2 \quad \text{Length BG} &= \sqrt{60^2 + 175^2 + 260^2} \quad \checkmark \\
 &= \sqrt{101\,825} \\
 &= 319,10 \text{ mm} \quad \checkmark \quad (2)
 \end{aligned}$$

$$\begin{aligned}
 11.1.3 \quad \text{Length AE} &= \sqrt{60^2 + 160^2 + 260^2} \quad \checkmark \\
 &= \sqrt{96\,800} \\
 &= 311,13 \text{ mm} \quad \checkmark \quad (2)
 \end{aligned}$$

$$\begin{aligned}
 11.1.4 \quad \text{Length GD} &= \sqrt{130^2 + 140^2 + 260^2} \quad \checkmark \\
 &= \sqrt{104\,100} \\
 &= 322,43 \text{ mm} \quad \checkmark \quad (2)
 \end{aligned}$$

$$\begin{aligned}
 11.1.5 \quad \text{Length HC} &= \sqrt{40^2 + 130^2 + 260^2} \quad \checkmark \\
 &= \sqrt{86\,100} \\
 &= 293,43 \text{ mm} \quad \checkmark \quad (2)
 \end{aligned}$$

$$\begin{aligned}
 11.1.6 \quad \text{Length HK} &= \sqrt{130^2 + 260^2} \quad \checkmark \\
 &= \sqrt{84\,500} \\
 &= 293,43 \text{ mm} \quad \checkmark \quad (2)
 \end{aligned}$$

$$\begin{aligned}
 11.2 \quad 11.2.1 \quad \text{Length AB} &= \pi \times D \div 2 \quad \checkmark \\
 &= \pi \times 800 \div 2 \quad \checkmark \\
 &= 1\,256,8 \text{ mm} \quad \checkmark \quad (3)
 \end{aligned}$$

11.2.2 Circumference of small circle:

$$\text{Circumference} = \pi \times D \checkmark$$

$$= \pi \times 350 \checkmark$$

$$= 1\,099,7 \text{ mm} \checkmark \quad (3)$$

11.2.3 Length 0 – 2:

$$0 - 2 = D \div 2 \checkmark$$

$$= 350 \div 2 \checkmark$$

$$= 175 \text{ mm} \checkmark \quad (3)$$

[21]

TOTAL: 200